

### 2MP Full HD WDR Network IR Bullet Camera

#### Key Features

- 1/2.7" progressive scan CMOS
- Support H.264 & MJPEG dual codec
- 25/30fps@1080(1920×1080)
- Smart Detection supported
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(PVMS) & Smart Phone(PMOB)
- 2.7mm ~12mm motorized lens
- 2/1 Alarm in/out, 1/1 audio in/out
- Max. IR LEDs Length 50m
- Micro SD memory card
- Ip67, PoE




#### Technical Specifications

<b>Model</b>	PI-SPW201L
<b>Camera</b>	
Image Sensor	1/2.7" progressive scan CMOS
Effective Pixels	1920(H) x 1080(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/100000s
Min. Illumination	0.01Lux/F1.4(Color); 0Lux/F1.4(IR on)
S/N Ratio	More than 50dB
Video Output	1 port
<b>Camera Features</b>	
Max. IR LEDs Length	50m
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	BLC / HLC /WDR(120dB)
White Balance	Auto/Sunny/Night/Outdoor/Customized
Gain Control	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 areas
<b>Lens</b>	
Focal Length	2.7mm~12mm
Max Aperture	F1.4
Focus Control	Motorized
Angle of View	H: 99°~34°
Lens Type	Motorized/ Auto Iris(DC)
Mount Type	Board-in Type
<b>Video</b>	
Compression	H.264/H.264H/H.264B/MJPEG
Resolution	1080P(1920x1080)/1.3M(1280x960)/720P(1280x720)/D1(704x576/704x480)/CIF(352x288/352x240)
Frame Rate	Main Stream 1080P/720P(1 ~ 25/30fps) Sub Stream D1/CIF(1 ~ 25/30fps) Third Stream 720P(1 ~ 13/4fps)
Bit Rate	H.264: 32K bps~ 10Mbps
<b>Audio</b>	
Compression	G.711a/ G.711u/ AAC
Interface	1/1 channel In/Out
<b>Smart Function</b>	
Smart detection	Tripwire
	Intrusion
	Abandoned/Missing
	Scene Change
	Audio detect
	Face detect
<b>Network</b>	
Ethernet	RJ-45 (10/100Base-T)
Wi-Fi	N/A
Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, 802.1x
ONVIF	ONVIFPSIA, CGI
Max. User Access	20 users
Smart Phone	iPhone, iPad, Android
<b>Auxiliary Interface</b>	
Memory Slot	Micro SD, Max 128GB
RS485	N/A
Alarm	2/1 channel In/Out
PIR Sensor Range	N/A

<b>General</b>	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	<11.5W (with IR on)
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	N/A
Dimensions	272.9 mm x 94.9mm x 94.9mm
Weight	1.1kg

#### Dimensions (mm)

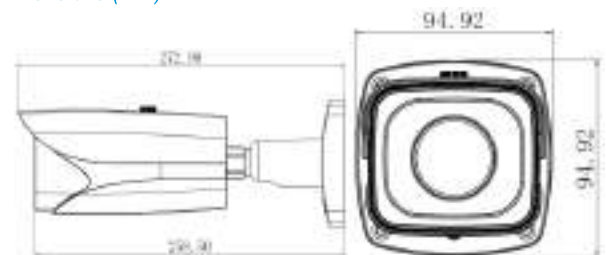

#### Accessories (optional)

